

SANFEED Sky 4HD

Wire Feeder

Processes

MIG (GMAW), Pulse MIG (PGMAW),
Flux Cored (FCAW)

Product Number

WF1300

Input Voltage

24 VAC 1Phase, 50/60 Hz.

Rated Output

500A @ 100% Duty Cycle

Wire Speed Range

58 - 850 IPM (1.5 - 22 m/min)

Wire Size Range

.024" - 5/64" (0.6 - 2.0 mm)

See back for complete specifications.

Industrial Applications:

Heavy- or light-duty fabrication shops, Trailer manufacturers, Furniture manufacturers, Automotive products, Educational institutions.

Features:

- **Inch Purge Switch:** 'Cold' wire inch and gas purge.
- **Gun Trigger Hold (2T/4T):** Allows for standard or latched gun trigger.
- **Remote Voltage Control:** Allows adjustment of power source voltage from the wire feeder.
- **Machined feed head & tension arms:** Heavy Duty, precision, ensures wire alignment tolerances of +/- .002. Large 4 driven drive roll system. Optimized wire traction for improved feedability.
- **Electronic speed control & dynamic breaking:** Optimized speed control with line voltage and load compensation.
- **Coax Interface cables:** Easy fit, plug-in, includes control, power and gas in one cable.
- **TWECO® Style Welding Gun Connection:** Quick and easy connection and disconnection for welding guns.
- **Digital Meters:** Weld Current and adjustable controls.
- **Welding Wire Spool Cover:** Heavy Duty cover protects wire from the elements.

**Performance
Features
Reliability**



3 Year Warranty

SanRex

Customer Care
Tel: 516-625-1313
Fax: 516-625-8845

www.sanrex.com
SANFEED SKY4HD
Form No.:71018SKY4HD

Features



Spool Wire Cover

Heavy Duty Cover to protect welding wire.

Control Knob

Operator control of Wire feed speed.

2T/4T Switch

Standard or latched trigger.

Inch Purge Switch

"Cold" wire inch and gas purge.

Voltage Control Knob


Operator control of Power Supply Voltage.

Digital Meters

Weld Current and adjustment controls.

Tweco® style Heavy Duty Gun Connection

Quick and easy connection and disconnection for welding guns.

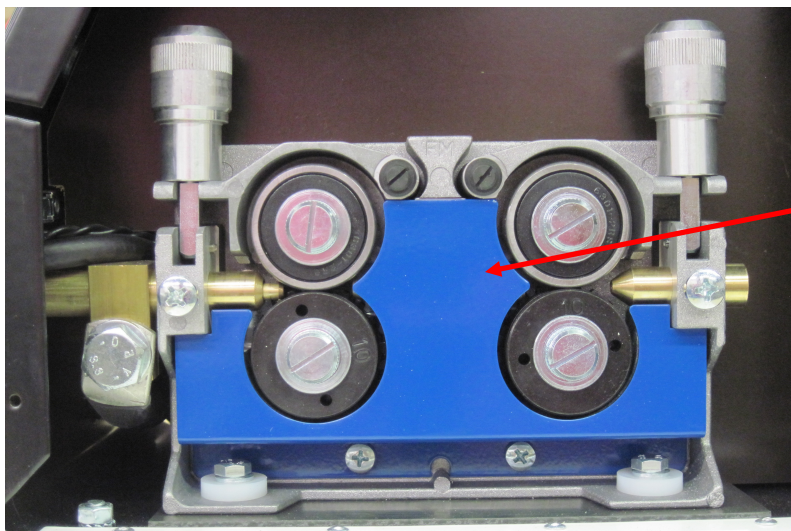

Machined feed head & Tension arms

Heavy Duty, precision, ensures wire alignment tolerances of ± 0.002 . Large 4 driven drive rolls. Optimized wire traction for improved feedability.

Specifications

Sky 4HD
Input Voltage 24 V, 1 Phase, 50/60 Hz.
Rated Output @ Duty Cycle 500A @ 100%
Input Frequency 50/60 Hz
Wire Speed Range 58 – 850 IPM (1.5 - 22 m/min.)
Wire Size Range 0.024" - 5/64" (0.6 - 2.0 mm)
Wire Spool Size 10 lb (4,5 kg) 8" Spool 15 lb (6.8 kg) 8" Spool 30 lb (13.6 kg) 12" Spool 45 lb (19.5 kg) 12" Spool
Approvals CSA (Pending); IP23S, IEC 60974-1 (CE)
Weight 35.27 lb (16 kg)
Dimensions (HxWxD) 13.38" x 12.60" x 21.65" (340 x 320 x 550 mm)



Coaxial Interconnect Cable

Gas, Power and Control cable in one heavy duty one piece easy to connect coax cable.

Ordering Information

Product	Part Number	Description
SANFEED Sky 4HD	WF1300	Four roll CV wire feeder with wire feed speed/amp control & voltage control; burnback and Digital Meters; <i>includes drive rolls for 0.035 & 0.045 solid wire.</i> <i>Note: Coaxial Interconnect Cable not included. Order below.</i>

Accessories

Caster Kit	WFW001	Four swivel caster set.
Coaxial Interconnect Cable - Complete assembly from wire feeder to power source.		
4ft. Coaxial Cable	WFC004	Coaxial Interconnect Assembly
8 ft. Coaxial Cable	WFC008	Coaxial Interconnect Assembly
15 ft. Coaxial Cable	WFC015	Coaxial Interconnect Assembly
25 ft. Coaxial Cable	WFC025	Coaxial Interconnect Assembly
50 ft. Coaxial Cable	WFC050	Coaxial Interconnect Assembly
Drive Rolls (Sold individually, 2 smooth required per feeder)		
Drive Roll	WFR001	0.023", 0.030" (0.6, 0.8 mm) Hard Wire (V Grooved)
Drive Roll	WFR003	0.035", 0.045" (0.9, 1.2 mm) Hard Wire (V Grooved)
Drive Roll	WFR006	0.052", 1/16" (1.3, 1.6 mm) Hard Wire (V Grooved)
Drive Roll	WFR007	0.035", 0.045" (0.9, 1.2 mm) Flux Cored Wire (Knurled)
Drive Roll	WFR011	0.052", 1/16" (1.3, 1.6 mm) Flux Cored Wire (Knurled)
Drive Roll	WFR013	5/64" (2.0 mm) Flux Cored Wire (Knurled)
Drive Roll	WFR014	0.035", 3/64" (0.9, 1.2 mm) Aluminum Wire (U Grooved)
Drive Roll	WFR020	Smooth
MIG Guns		
TWECO® Style	MGT25012-35	12ft, 250 Amp, 0.035 wire w/4-pin connector
TWECO® Style	MGT25012-45	12ft, 250 Amp, 0.045 wire w/4-pin connector
TWECO® Style	MGT35012-35	12ft, 350 Amp, 0.035 wire w/4-pin connector
TWECO® Style	MGT35012-45	12ft, 350 Amp, 0.045 wire w/4-pin connector
TWECO® Style	MGT45012-35	12ft, 450 Amp, 0.035 wire w/4-pin connector
TWECO® Style	MGT45012-45	12ft, 450 Amp, 0.045 wire w/4-pin connector